CORSO USA

BACKLIT PANEL SERIES

SensorReady



Main Features

- Watts Selectable
- CCT Selectable
- PIR Sensor Ready
- EM Backup Ready
- Max Output Up 6,650lm
- Dimming: 0-10V
- Backlit for uniform lighting




SENSOR READY


Product Specifications

Model no.	Sensor base	Size	Power	Voltage	CCT	CRI	Output	Efficacy
ML-BLPLS-14-40WSelect-5CCT	Recessed PIR Sensor	1x4	20W/28W/34W/40W	120-277V	30K/35K/40K/50K/65K	80	Up to 5,180lm	Up to 160lm/W
ML-BLPLS-22-40WSelect-5CCT	Recessed PIR Sensor	2x2	20W/28W/34W/40W	120-277V		80	Up to 5,140lm	Up to 160lm/W
ML-BLPLS-24-40WSelect-5CCT	Recessed PIR Sensor	2x4	20W/28W/34W/40W	120-277V		80	Up to 6,650lm	Up to 160lm/W














Product Details



End Cap with
Recessed Sensor Base



Junction box




Rear Cover




CCT & Wattage
Selectable Switches

Dimensions

1x4
ML-BLPLS-14-40WSelect-5CCT

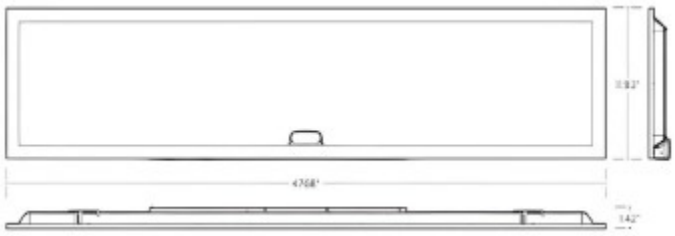

2x2
ML-BLPLS-22-40WSelect-5CCT

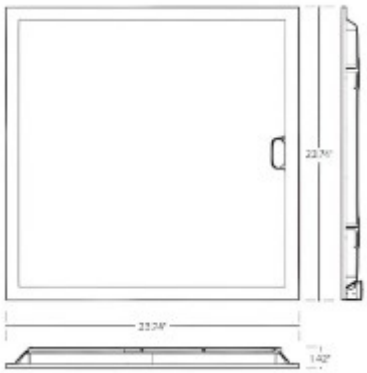

2x4
ML-BLPLS-24-40WSelect-5CCT




CORSO USA

BACKLIT PANEL SERIES



Main Features

- Watts Selectable
- CCT Selectable
- EM Backup Ready
- Max Output Up 6,250lm
- Dimming: 0-10V
- Backlit for uniform lighting

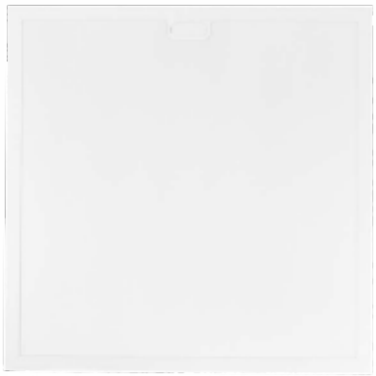



Product Specifications

Model no.	Size	Power	Voltage	CCT	CRI	Output	Efficacy
ML-BLP-14-40WSelect-5CCT	1x4	20W/28W/34W/40 W	120-277V	30K/35K/ 40K/50K/ 65K	80	Up to 5,000lm	Up to 150lm/W
ML-BLP-22-40WSelect-5CCT	2x2	20W/28W/34W/40 W	120-277V		80	Up to 5,000lm	Up to 150lm/W
ML-BLP-24-50WSelect-5CCT	2x4	25W/34W/42W/50 W	120-277V		80	Up to 6,250lm	Up to 150lm/W














Product Details


LED Flat Panel Light



Junction box



Rear Cover




CCT & Wattage Selectable Switches

Dimensions

1x4
ML-BLP-14-40WSelect-5CCT



2x2
ML-BLP-22-40WSelect-5CCT

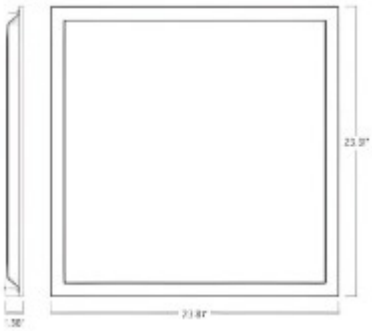

2x4
ML-BLP-24-50WSelect-5CCT

